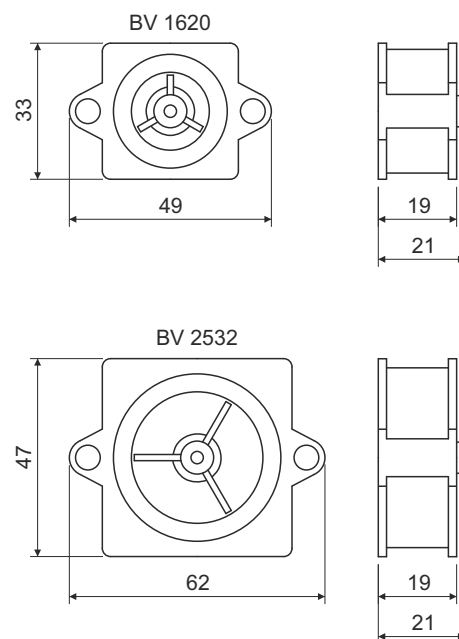


bushing for pipes

BV 1620**BV 2532**

product description:

the glands are fixed to the formwork using nails
 after hardening of the concrete mixture, formwork is removed together with front side
 to introducing pipes is used BK-type ending
 BV 1620 is designed for ending BK 16, BK 20
 BV 2532 is designed for ending BK 25, BK 32, BK 16 CSN, BK 23

material: PP (halogen-free)

color: gray

self-snuffing: no

temperature resistance: -5 - +60 °C (short-time +90 °C)

flaming loop test: 650 °C

fire class for underlying material: A1

weight: BV 1620 - 7 g; BV 2532 - 11 g

certification: EN 60 670-1

storage: ČSN 64 0090

configuration:

BV 1620: configuration KA - 40 bushings packed in bag, labeled; 560 bushings in cardboard

BV 2532: configuration KA - 40 bushings packed in bag, labeled; 280 bushings in cardboard

