


## KOPOBOX MINI L

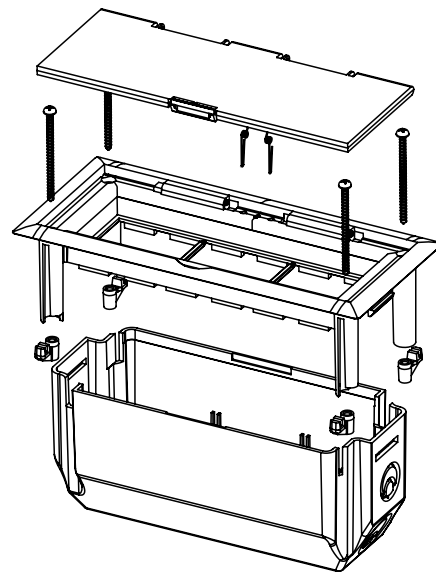

product  
description:

designed for distribution system with voltage 500 V  
 the configuration is intended for assembling to furniture, into the hollow walls or to double floors (thickness of the desk 9-38 mm)  
 fast assembling by help of fixation lugs  
 the cover box enables the fixation of cables against their rapture  
 it enables the assembling of modular devices of 45x45 (max. 3 pcs) and 22,5x45 (max. 6 pcs), recommendations of devices manufacturers Legrand, ABB, PEHA, Simon connect, Schneider electric  
 dimensions of a complete set: 175 x 80 x 75 mm

material: PC-ABS (halogen-free)

color: light gray RAL 7035 / white RAL 9003 / titanium

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

protection types: IP 20

weight: 173 g

certification: EN 60 670-1, TP-KO-02/13 art. 15.101 a) allowable deflection to 5.5 mm

storage: ČSN 64 0090

configuration:

HB - package - 1 set in cardboard; color cover and frame - white RAL 9003  
 KB - package - 1 set in cardboard; color cover and frame - light gray RAL 7035  
 N1B - package - 1 set in cardboard; color cover and frame - titanium - to order

instruction:

To furniture, into the hollow walls or to double floors is cut hole 164x67 mm.  
 To cover boxes bring cables that are fixed with clips.  
 The frame snaps into box and placed together in the prepared hole.  
 The frame is attached with screws and feet to the base material.  
 The frame is fitted with modular devices.  
 The cover with spring is attached to the frame.



video-instruction