


branch vertikal-horizontal

item number	for width of cable tray	for height of cable tray	A	thickness of metal sheet
OSHK 50X62	62	50	300	0,8
OSHK 50X125	125	50	300	0,8
OSHK 50X250	250	50	300	1,0
OSHK 100X125	125	100	372	0,8
OSHK 100X250	250	100	372	1,0
OSHK 100X500	500	100	372	1,2

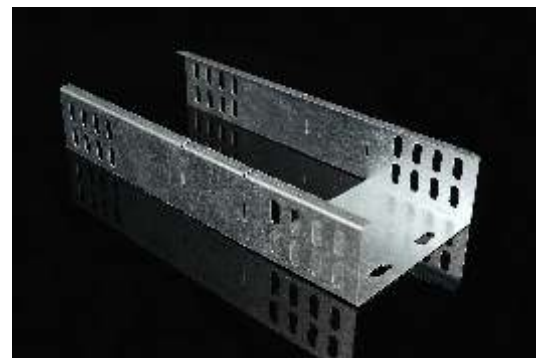

product description: The branch is designed to transition from a horizontal to a vertical route, or from a vertical to a horizontal route.

It is suitable for branching from the main cable routes for example, to machines or other devices.

It is used together with the low elbow NKO.

Protected by Industrial Design.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

configuration: S - Pre-Galvanized, zinc-layer 15 - 27 µm
F - Hot Dip Galvanized, zinc-layer 50 - 100 µm

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1

