

item number: **PUK 38X150 S1_S**

thickness of metal sheet: 0,8 mm

product description: The floor trunking is used to connect the KUP 57 and KUP 80 floor boxes.

The SPUK floor channel coupling is used to connect the channels.

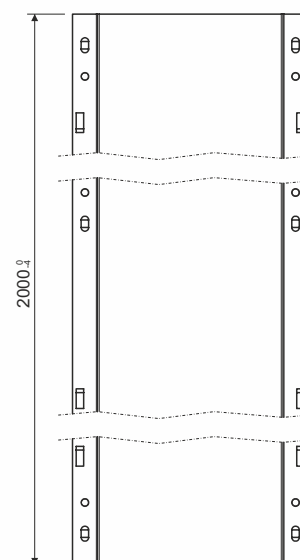

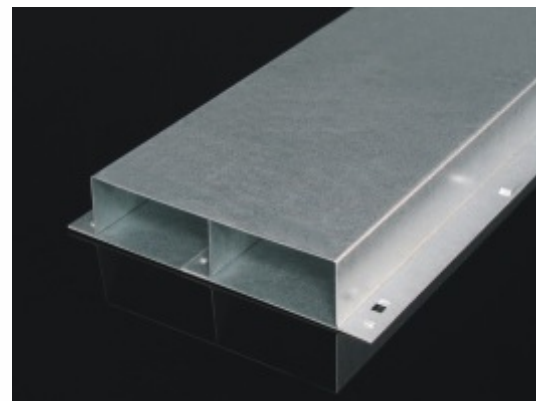
A PLUK interconnecting cable is suitable for ensuring conductive equipotential bonding, for which there are protrusions on the floor channel.

surface finish: Pre-galvanised

sales amount: á 2 m

certification: EN 50085-2-2

storage: EN 60721-3-1

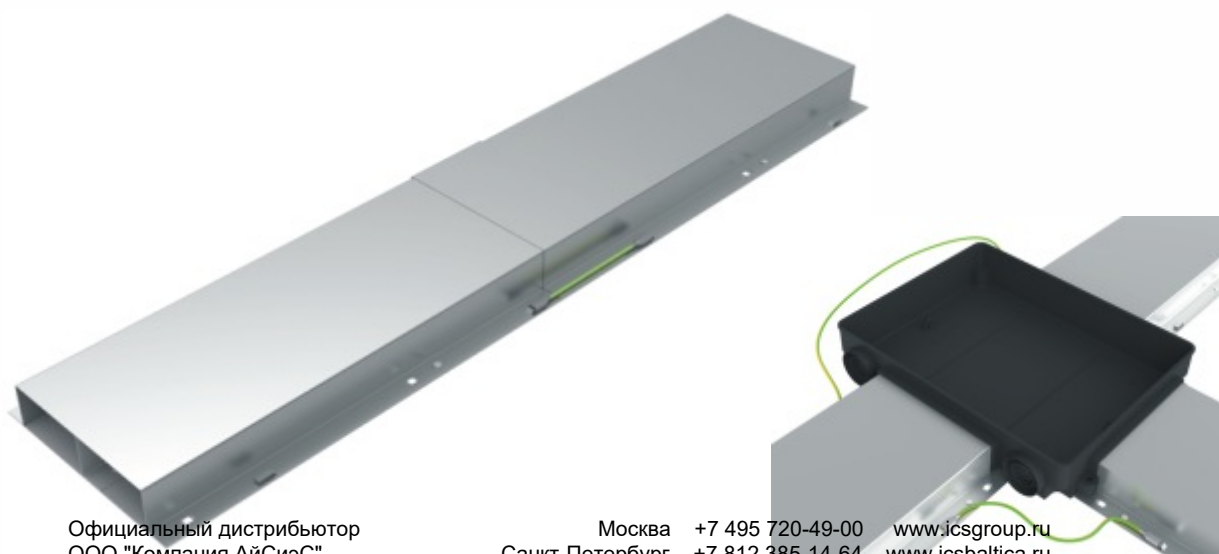
**Inner usable cross-section of the trunking**

floor trunking	cross-section mm ²	data cables		CYKY	CYKY	CYKY	CYKY
		Ø5,5	Ø7	Ø8,6	Ø10,1	Ø9,5	Ø11,2
PUK 38X150 S1_S	5700	94	58	39	28	32	23

The notes shape the quantity of cable with 100% fullness of trays. It is necessary to divide by 2 for each canals chamber.

The values state the number of cables with the tray at 50% full. Orientation diameters of the cables CYKY.

The values are mathematically calculated. The limit values (small tray x big cable or contrariwise) it is necessary to consider combination of the tray and diameter of the cable and used them with reference to technical conditions.



Официальный дистрибьютор
ООО "Компания АйСизС"

Москва +7 495 720-49-00 www.icsgroup.ru
Санкт-Петербург +7 812 385-14-64 www.icsbaltica.ru