
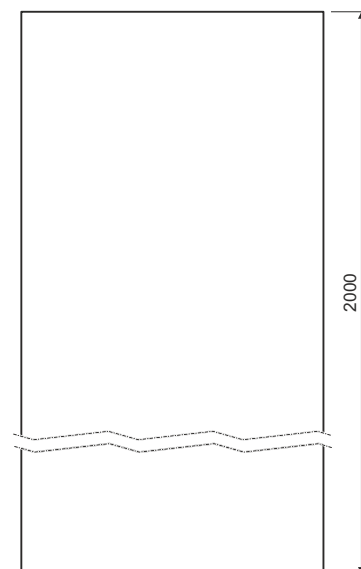


| item number  | for width of<br>cable tray<br>A | height<br>H | thickness of<br>metal sheet |
|--------------|---------------------------------|-------------|-----------------------------|
| <b>V 40</b>  | 40                              | 10          | 0,55                        |
| <b>V 50</b>  | 50                              | 11          | 0,55                        |
| <b>V 62</b>  | 62                              | 11          | 0,55                        |
| <b>V 75</b>  | 75                              | 11          | 0,55                        |
| <b>V 100</b> | 100                             | 11          | 0,55                        |
| <b>V 125</b> | 125                             | 11          | 0,55                        |
| <b>V 150</b> | 150                             | 11          | 0,55                        |
| <b>V 200</b> | 200                             | 11          | 0,55                        |
| <b>V 250</b> | 250                             | 11          | 0,55                        |
| <b>V 300</b> | 300                             | 11          | 0,80                        |
| <b>V 400</b> | 400                             | 14          | 1,00                        |
| <b>V 500</b> | 500                             | 14          | 1,00                        |
| <b>V 600</b> | 600                             | 14          | 1,20                        |



|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| product description: | <p>The cable tray cover is used to cover cable trays.</p> <p>The standard length of the cable tray cover is 2 m.</p> <p>Mentioned thickness of the metal plate is just orientation.</p> <p>We recomend cable tray cover Hot-Dip Galvanized in 0,8-1,2 mm thick steel plate.</p> <p>The fixing of the cover to the tray is done using the cover fixture VU (2 pcs per meter), except for V 40. The V 40 cover may be alternatively fixed using a clamping belt.</p> <p>The cover may be supplied in polyester varnish (varnish layer 60, 100 µm).</p> |
| configuration:       | <p>S - Pre-Galvanized, zinc-layer 15 - 27 µm</p> <p>F - Hot Dip Galvanized, zinc-layer 45 µm (min. 35 µm)</p> <p>EO - epoxy coating for indoor environment, along the perimeter, 60 µm</p> <p>EC - epoxy coating for indoor environment, - total paint, 60 µm</p>                                                                                                                                                                                                                                                                                    |
| sales amount:        | á 2000 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| certification:       | ČSN EN 61537:02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| storage:             | ČSN EN 60721-3-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |