



item number	A	thickness of metal sheet	weight kg/pc
DV 75_S	68	1,5	0,07
DV 75_GMT			
DV 100_S	75	1,5	0,08
DV 100_GMT			
DV 150_S	125	1,5	0,13
DV 150_GMT			
DV 200_S	175	1,5	0,18
DV 200_GMT			
DV 300_S	275	1,5	0,29
DV 300_GMT			
DV 400_S	375	1,5	0,39
DV 400_GMT			
DV 500_S	475	1,5	0,50
DV 500_GMT			
DV 600_S	575	1,5	0,60
DV 600_GMT			

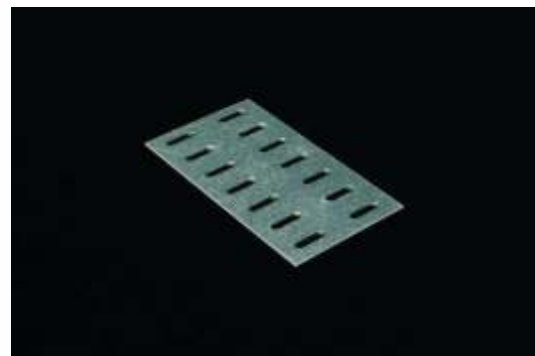

product description: Is used for reinforcing the tray connections without integrated coupling.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

The plate and bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 μm
 GMT - non electrolytic plating, aluminum-zinc-layer 5-15 μm
 (equivalent Hot Dip Galvanized)

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1

