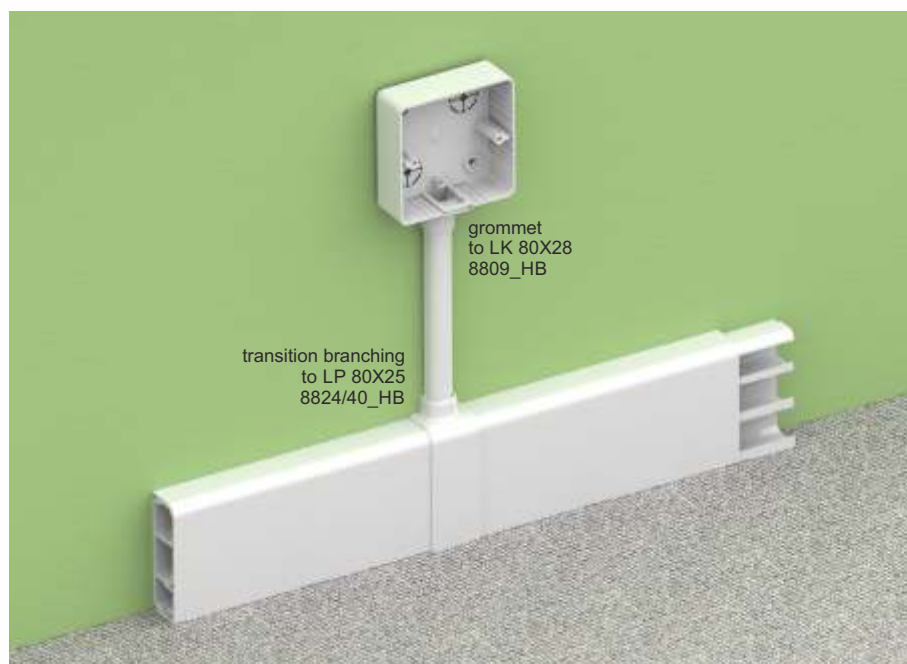


product description: intended for installation to the distribution of low voltage

one side of the lid is a part of the trunking body, the second side of the lid can be simply snapped on, it is fitted with double lock increasing the trunking's rigidity and ensuring stronger cover fixation

designed for wall or ceiling mounting

material: PVC - Pb-free

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

impact strength: 0,5 J

protection types: IP30

fire class for underlying material: A1-F

inside area: 120 mm²

distance base perforation: 200 ±20 mm

length tolerance: ±10 mm

weight: 0,07 kg/m

certification: EN 50085-1 ed.2:06, EN 50085-2-1:07

storage: ČSN 64 0090



usage of inner trunking cross-section (60%):	orientation cable diameter (mm)	6	7	8	8,5	9	9,5
	number of inserted cables	2	1	1	1	1	1

chemical resistance: YES: amoniak 25%, distilled water, ethanol 50%, sodium hydroxide 60%, hydrofluoric acid 40%, acetic acid 5%, sulfuric acid 96%, medicinal oil, methanol, olive oil, petroleum, hydrogen peroxide 20%, transformer oil, sodium carbonate

NO: acetone, benzen, chlorinated hydrocarbons, tetrachlorocarbon

item number	length	color	package	package - description	note
LZK 15X12_HD	2 m	white RAL 9003	96 m	carton	-
LZK 15X12_P2	2 m	white RAL 9003	96 m	carton	self-adhesive tape
8809_HB		white RAL 9003	10 / 900 pcs	foil / carton	grommet (intended use with trunking box LK 80X28...)
8824/40_HB		white RAL 9003	10 / 480 pcs	foil / carton	transition branching (intended for transition to the LP 80X25 trunking)

Официальный дистрибьютор
ООО "Компания АйСизС"

Москва
Санкт-Петербург

+7 495 720-49-00
+7 812 385-14-64

www.icsgroup.ru
www.icsbaltica.ru