



product description: Trunkings are supplied with cover.

Optimal closing, fixed cover. Easy installation and removal.

Rib can be easily broken out at the bottom of the trunking.

From a fire point of view halogen-free trunkings used in areas with an emphasis on the safety of people and property, for example: public buildings, hospitals, schools, theaters, airports, shopping centers ...

material: PC-ABS, free of halogen, silicon and cadmium

hard to inflame according to DIN 4102: level B1

self-extinguishing according to UL 94: V0

flammability class according to DIN 5510-2: S4

flammability class according to NF F 16-101: M1

smoke emission classification according to DIN 5510-2: SR-2

smoke emission according to EN ISO 5656-2: $D_{s,max}=377$

drop-ability class according to DIN 5510-2: ST-2

flue gas density and toxicity according to NF F 16-101: F2

oxygen index according to ISO 4589-2: 34,4%

fire load: 5,2 kWh/kg

temperature resistance - static: -25 - +90 °C

temperature resistance - dynamic: -5 - +60 °C

working temperature: >0 °C




dielectric strength: >30 kV/mm

fire class for underlying material: A1-F


colour: RAL 7035 gray

certification: EN 50085-2-3


storage: ČSN 64 0090

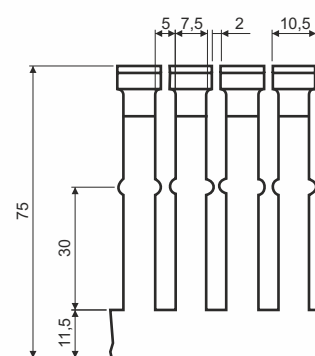

Perforation in one row up to the width of 50 mm.

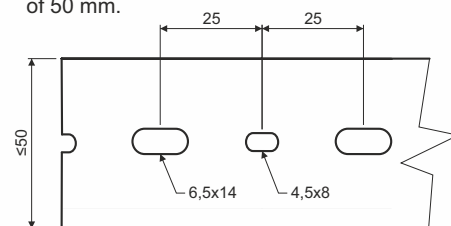

Perforation in three rows above the width of 75 mm.

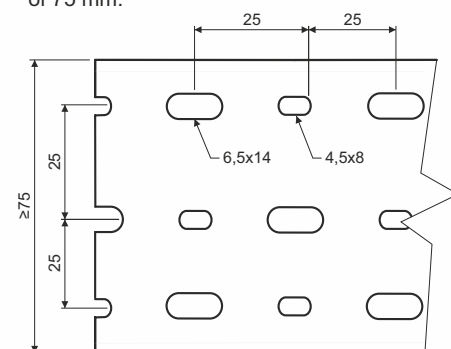

number of conductors when 50% of the trunking capacity is filled

0,75 mm ² Ø2,8 mm	1 mm ² Ø2,9 mm	1,5 mm ² Ø3,2 mm
---------------------------------	------------------------------	--------------------------------



type number

outer
width x height
(mm)

inner
width x height
(mm)

length
(m)

package
(m)

RK 50x50 HF_LD

Официальный дистрибьютор
ООО "Компания АйСизС"

50 x 50
45 x 45

2 Москва
Санкт-Петербург

47 495 720-49-166
+7 812 385-14-64

www.icsgroup.ru
www.icsbaltica.ru

126