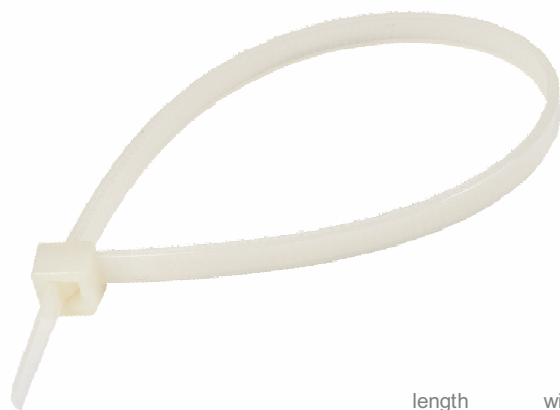


typové číslo	length L (mm)	width A (mm)	min. wrap diameter (mm)	max. wrap diameter (mm)	opening force (N)	package (pcs)	color
SP 100X2.5_FA	100	2,5	3	20	80	100	black
SP 100X2.5_HA	100	2,5	3	20	80	100	natural
SP 140X3.5_HA	150	3,6	3	33	180	100	natural
SP 140X3.5_FA	150	3,6	3	33	180	100	black
SP 140X4.5_HA	140	4,5	4	36	280	100	natural
SP 160X2.5_HA	165	2,5	4	39	80	100	natural
SP 160X4.5_HA	160	4,8	5	35	220	100	natural
SP 180X4.5_FA	190	4,8	4	45	220	100	black
SP 180X4.5_HA	190	4,8	4	45	220	100	natural
SP 200X4.5_FA	190	4,8	4	45	220	100	black
SP 200X4.5_HA	190	4,8	4	45	220	100	natural
SP 250X4.5_HA	250	4,8	5	62	220	100	natural
SP 280X4.5_FA	310	4,8	7	79	220	100	black
SP 280X4.5_HA	310	4,8	7	79	220	100	natural
SP 360X4.5_FA	368	4,8	7	96	220	100	black
SP 360X4.5_HA	368	4,8	7	96	220	100	natural
SP 360X7.5_FA	380	7,6	8	96	550	100	black
SP 360X7.5_HA	380	7,6	8	96	550	100	natural
SP 380X4.5_FA	368	4,8	7	96	220	100	black
SP 380X4.5_HA	368	4,8	7	96	220	100	natural
SP 430X4.5_FA	450	4,8	8	129	220	100	black
SP 430X4.5_HA	450	4,8	8	129	220	100	natural

material: polyamide

halogen-free: yes

temperature resistance: -40 - +85 °C

temperature resistance for montage: -10 - +30 °C

storage: ČSN 64 0090

product description: for normal bundling and fixing of cables, wires and pipes
 for fixing to a pad, use cable tie clamps SPPN 19X19 or SPP 19X19
 fire resistance according to U.L. 94 - V2
 not long-term resistant to sunlight

Recommendation: cable ties should be installed immediately after unpacking from the sealed bag. This will prevent unnecessary reduction in the level of humidity PA, which would result in a reduction of the cable tie quality.

Официальный дистрибьютор
 ООО "Компания АйСизС"

Москва +7 495 720-49-00 www.icsgroup.ru
 Санкт-Петербург +7 812 385-14-64 www.icsbaltica.ru