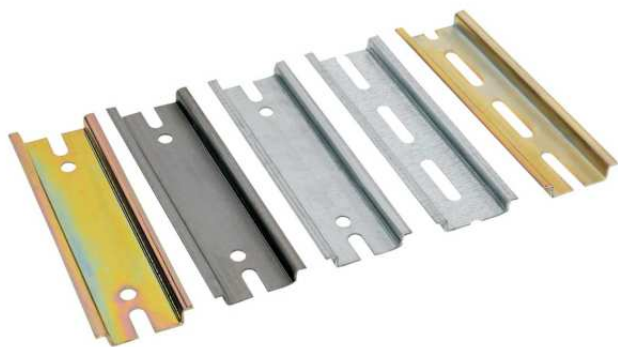


**description:** rails are designed for instrument attaching into the distributors, instrument board and similar devices

instruments (circuit breakers, contactors, terminals, relay, protectors, switching clock, raw terminals ect.) could be pushed from side to side or clicked from the front and arrested

rails are manufactured with continuous punching, without cleaving or with holes and grooves for attaching to the washer at both ends of the rail

**surface:** S - Pre-Galvanized steel, zinc layer is 15 - 27  $\mu\text{m}$   
 ZNCR - Bichromatic galvanized, zinc layer 10  $\mu\text{m}$   
 XX - without any surface

**material thickness:** 1 mm

**certification:** ČSN EN 60715

**storage:** ČSN EN 60721-3-1

| item number             | surface             | description      | width x height (mm) | length (m)                 |
|-------------------------|---------------------|------------------|---------------------|----------------------------|
| <b>TS35_XX</b>          | without any surface | with cleaving    | 35 x 7,5            | according to specification |
| <b>TS35_ZN_S</b>        | Sendzimir           |                  |                     |                            |
| <b>TS35_ZN-CR_ZNCR</b>  | ZNCR                |                  |                     |                            |
| <b>TS35_P_XX</b>        | without any surface | -                | 35 x 7,5            | 3                          |
| <b>TS35_ZNP_S</b>       | Sendzimir           |                  |                     |                            |
| <b>TS35_D_XX</b>        | without any surface | with perforation | 35 x 7,5            | according to specification |
| <b>TS35_DZN_S</b>       | Sendzimir           |                  |                     |                            |
| <b>TS35_DZN-CR_ZNCR</b> | ZNCR                |                  |                     |                            |
| <b>TS35_DP_XX</b>       | without any surface |                  |                     |                            |
| <b>TS35_DZNP_S</b>      | Sendzimir           |                  |                     | 3                          |

Example: TS 35 DZN-CR 0.2: perforated rail, ZNCR surface, length 0,2 m