

item number: **NIXKZN 20X40**

length of cable tray: 2000 mm

thickness of metal sheet: 0,8 mm


product description: Cable tray is designed to create a cable route.
The joining of the trays is performed using the coupling NIXS 40 and two NIXSMP 5X10

configuration: IX - stainless steel AISI 304
(AISI 316, AISI 316L only to order)


sales amount: á 2 m

certification: EN 61537:02

storage: EN 60721-3-1

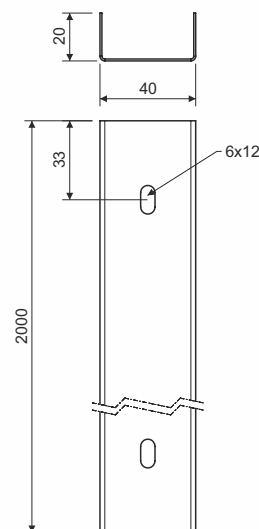

The graph shows the maximum allowed even loading of the tray in relation to the distances of the supports.

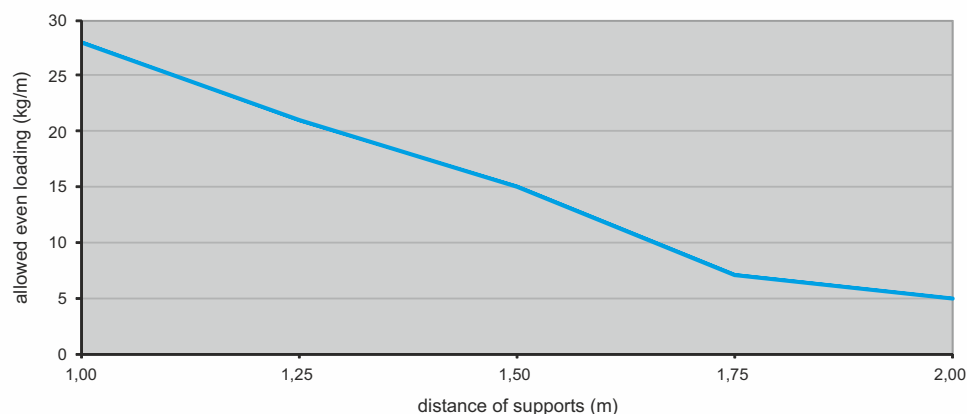

Inner usable cross-section of the channel

item number	cross-section cm ²	CYKY 3x1,5	CYKY 5x1,5	CYKY 3x2,5	CYKY 5x2,5	CYKY 3x4	CYKY 5x4	CYKY 5x6	CYKY 5x10
		Ø8,6	Ø10,1	Ø9,5	Ø11,2	Ø11,2	Ø13,8	Ø15,1	Ø18
NIXKZN 40X20	8	5	4	4	3	3	2	2	1

The values state the number of cables with the tray at 50% full. Orientation diameters of the cables CYKY.

The values are mathematically calculated. The limit values (small tray x big cable or contrariwise) it is necessary to consider combination of the tray and diameter of the cable and used them with reference to technical conditions.

Официальный дистрибьютор
ООО "Компания АйСиЭсС"

Москва +7 495 720-49-00 www.icsgroup.ru
Санкт-Петербург +7 812 385-14-64 www.icsbaltica.ru